



VPT-501/HZ RAL7035

Article number: 75309

Pan/Tilt Head with Heater, 24V, 100°/sec. max.,
RS-485, 24V, RAL7035

Mainfeatures

Load capacity up to 12kg

Rotation range: +/-180°

64 presets

RS-485 serial interface

Protection rating: IP65

Maintenance-free

Speed: 100°/sec. max.

Backlash: <0,2°

Autopan function

Supply voltage: 24VAC, 50/60Hz

Housing finish: RAL7035

Heaters as standard

Specifications

Pattern	no
Autopan	yes
Rotation range	359 °
Speed range at manual control	0 ~ 100° horizontal, 0 ~ 50° vertical. 0 to 100°/sec.: 0.22sec.
Preset speed	0 ~ 100° horizontal, 0 ~ 50° vertical. 180° positioning needs 2.5sec. (at max. speed)
Tilt range	+/-90°
Serial interfaces	RS-422, RS-485
Series	eneo VPT
Colour (housing)	RAL7035
Housing	Aluminium frame with plastic covers
Housing material	aluminium, plastic

VPT-501/HZ RAL7035

Continued Specifications

Weight	8.0kg
Heater	yes
Power consumption	120W max. (incl. camera and heater)
Positioned freely	yes
Mounting of illuminator possible	optional
Protection rating	IP65
Supply voltage	24VAC
Temperature range (operation)	-40°C ~ +50°C
Temperature range with built-in heater	-40°C ~ +50°C
Load capacity	(load assembly in the horizontal and vertical center of gravity required)\$
Load capacity	12 kg
Backlash	<0.2°
Parts supplied	Screw set, 13pin / 24pin connectors, Allen key (5mm), PC Setup and Control Software on CD ROM
Model	pan&tilt head

Special features

No mechanical end switches, no potentiometer for positioning feedback. Stop position control configuration made by PC Control Software (included). Absolute positioning





VPT-501/HZ RAL7035

Available Accessories

Image	Prod. No / Label	Description
	203427 / WD-32 RAL7035	Wall Bracket for Pan/Tilt Heads, VPT-40/601/501 Series, RAL7035
	79682 / VHM/ZLB-W	Weatherproof Housing (330), Heater, Central Plug, RAL9016/7035

VPT-501/HZ RAL7035

Technical Drawing

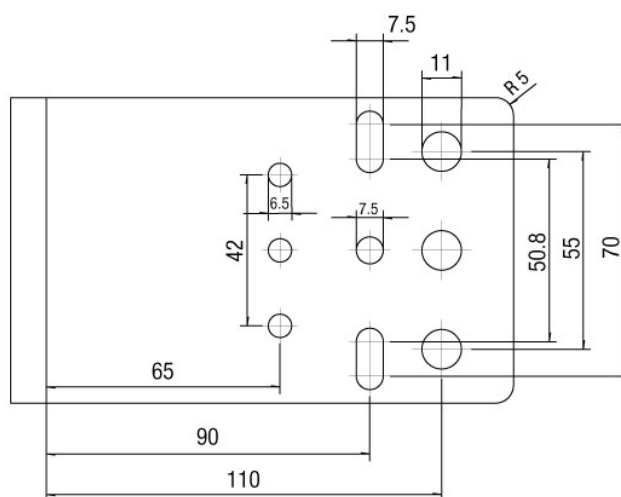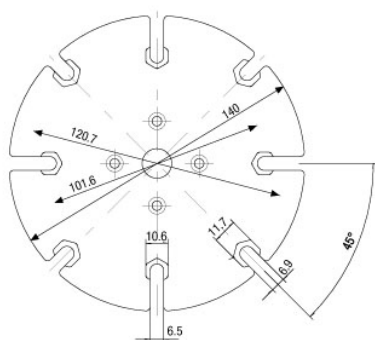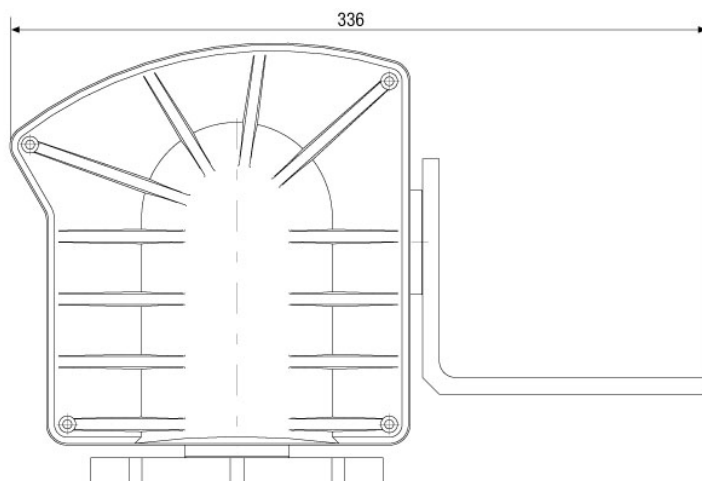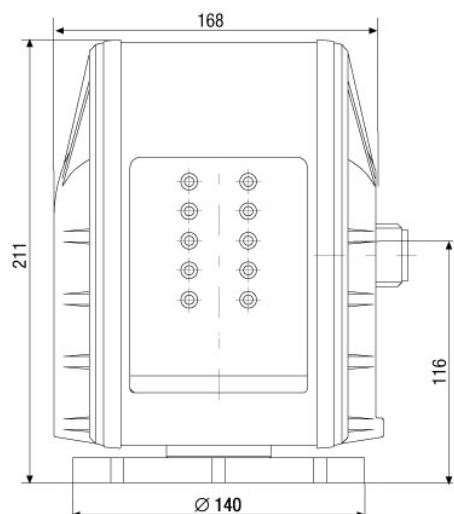

Maße/Dimensions: mm

Your Contact Person



eneo is a registered trademark of
VIDEOR E. Hartig GmbH
Carl-Zeiss-Straße 8
63322 Rödermark
Deutschland
Tel.: +49 6074-888-333
E-Mail: info@eneo-security.com
Web: www.eneo-security.com