

ACT365 ACU

Single Door Cloud Controller with Dual Ethernet and 2 Amp PSU



Introduction:

ACT365 ACU is a single door IP Controller with 12V DC 2 Amp PSU and includes a dual port Ethernet switch. The controller includes a rich set of advanced access control features, including voltage monitoring, break glass monitoring, interlock/airlock. ACT365 is ideal to manage the physical security from a single site up to thousands for sites with unlimited doors.


Benefits:

No upfront server costs
No Server maintenance or licensing
No backup issues
No complicated networking issues
No IT headaches



Features:

- Unlimited sites and doors managed from one unified interface
- Integrated Access Control and Video; Monitor live video stream and review recorded video associated with events and doors.
- Manage and control access from anywhere, at any time and on any device (PC, Tablet, smart phone)
- Native iOS and Android apps (free to download) on iTunes and Android Play stores
- Automatic notification on critical door events, voltage problems, break glass, tamper
- Muster reporting
- Dual port Ethernet switch, allows for IP connection
- 12V DC 2 Amp PSU
- Voltage Monitoring
- Break Glass Monitoring
- Monitoring of Mains Present, Output Voltage and Tamper
- Fire Override
- Airlock/Interlock
- TCP / IP - DHCP / Static IP addresses
- Status LED's
- Space in the enclosure for cable management
- Space in the enclosure for 1 x 7Hr Amp Battery
- Compatible with all ACT readers

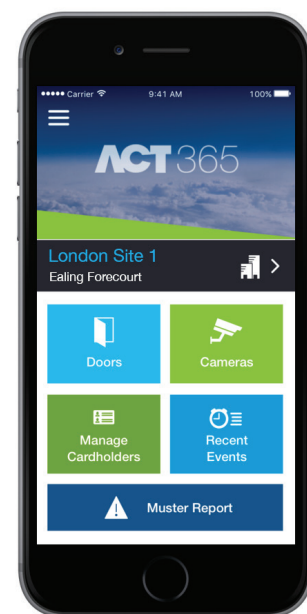

To use ACT365, you must first become a registered ACTinstaller. Simply register FREE at www.act.eu. When you receive your login details, login to the interACT portal and register again for 'My ACT365'.

Ordering Information

ACT365 ACU	Single Door IP Controller with 12 Volt 2 Amp PSU
------------	--

Product Comparisons	ACT365 ACU	ACT365 System
Card holders (Users)	10,000	Unlimited
Card credentials per User	2	2
PIN Codes per User	1	1
Doors on ACT365 ACU	1	Unlimited
Log Events	1,000	Unlimited
Door Monitoring (Door Forced/Ajar)	Yes	Yes
Fire Alarm Override	Yes	Yes
Interlock/Airlock	Yes	Yes
Voltage Monitoring	Yes	Yes
Break Glass Monitoring	Yes	Yes
AC Mains Monitoring	Yes	Yes
Battery Monitoring	Yes	Yes
Tamper Monitoring	Yes	Yes
Time Actions	Yes	Yes
Toggle/Latch	Yes	Yes
Card only or PIN only	Yes	Yes
Card and PIN	Yes	Yes
Validity period (From and To)	Yes	Yes
Muster Reporting	N/A	Yes
PSU (2Amp)	Yes	N/A
Ethernet Switch	2 Ports	N/A
DHCP/Static IP Addressing	Yes	N/A
NetBIOS name	Yes	N/A
Entry Exit Readers	Yes (multiple up to 500mA)	N/A
Supports ACTpro Readers	Yes	N/A
Door Relay output	Yes (5 Amp)	N/A
Auxiliary Relay Output	Yes (1 Amp)	N/A
Programmable inputs	1	N/A
Support IP connected controllers	Yes	N/A
Warranty period	5 Years	N/A

Product Specifications



Product Specifications	ACT365 ACU
Operating Voltage (ACT365 ACU)	12V DC
Operating Temperature	-10 to +50°C
Dimensions (h x w x d)	255mm x 235mm x 85mm
Weight	950g
Mounting	Surface
Installation	Indoor
Product Barcode	7017000

Electrical Specification ACT365 ACU

Input Voltage	230VAC +/- 10%
Frequency	47-53 Hz
Input Fuse	625mA 250V anti-surge fuse
Output Voltage	13.65V (+/- 5%)
Max Load	2A @ 25°C
Electrical Output Fuse	Yes
Battery Current	~0.5A for a battery discharge to ~10V
Battery Protections	Deep Discharge/Overcharge/Reverse Polarity

Certifications:

The ACT365 ACU complies with the following European directives:
Information technology equipment - Safety - EN60950-1
EMC Directive - 2004/108/EC

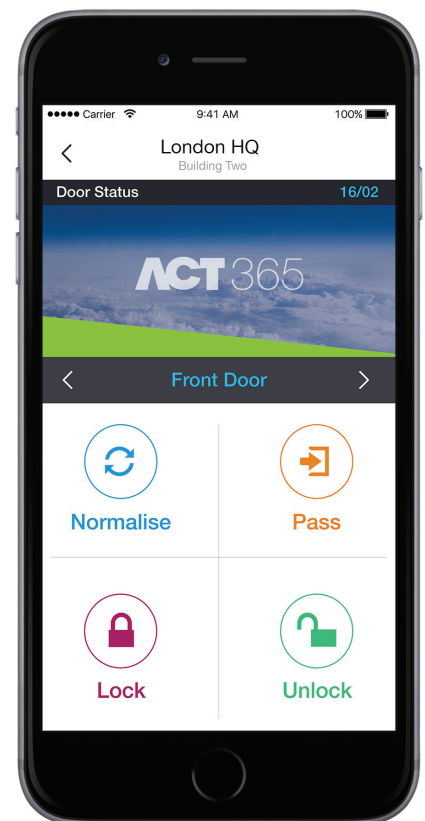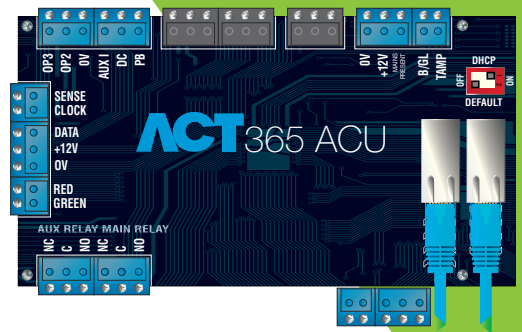

Android app: Supports Jelly Bean (OS 4.3) or later on devices with at least 160dpi



iOS app: Supports iOS 8 or later on iPhone 4S or above.



Unit C1, South City Business Centre, Tallaght, Dublin D24 PN28, Ireland
Unit 601, Birchwood 1, Dewhurst Road, Birchwood, Warrington, WA3 7GB, UK

www.act.eu

Tel +353 (0)1 466 2570
Tel +44 (0)161 236 9488



ACTing for the installer
for over 20 years